


Beeremat Board 2S



Two side bleached Beeremat Board

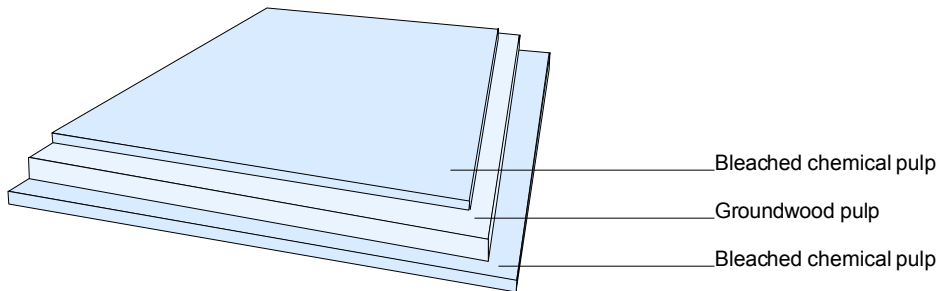

ISO 9001

Specifications for Beeremat Board 2S:

Property/Unit	Tolerance											Standards
Grammage, g/m ²	±5%	350	390	430	500	575	600	640	660	700	760	ISO 536
Thickness, µm	±5%	800	900	1000	1150	1350	1400	1500	1550	1650	1800	ISO 534
Moisture, %	±1.5%	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	ISO 287
ISO Brightness C/2°, %		77	77	77	77	77	77	77	77	77	77	ISO 2470
Surface Smoothness, Bendtsen, ml/min		1800	1800	1800	1800	1800	1800	1800	1800	1800	1800	ISO 8791-2
Scott Bond, J/m ²		90	90	90	90	90	90	90	90	90	90	ISO 8254-1
Absorbency, s		30	30	30	30	30	30	30	30	30	30	TAPPI 569

All properties according to Pankaboard measurements.

Test climate 23°C / 50%RH (according to ISO 187).
 Tolerances based upon 95% confidence limits, apply to reel average.
 In order to verify, reel average shall be based on 5 single measurements
 randomly sampled within the reel. These averages will be for at least
 19 of 20 reels within the specification limits.

For more information contact your local sales representatives or

Pankaboard Oy,
 Ruukintie 2
 FIN-81750 Pankakoski
 Tel. +358 (0) 2046 123
 www.pankaboard.com

Issued 07/2007