


# Woodpulp Board 1S Frame



## One side bleached Woodpulp Board

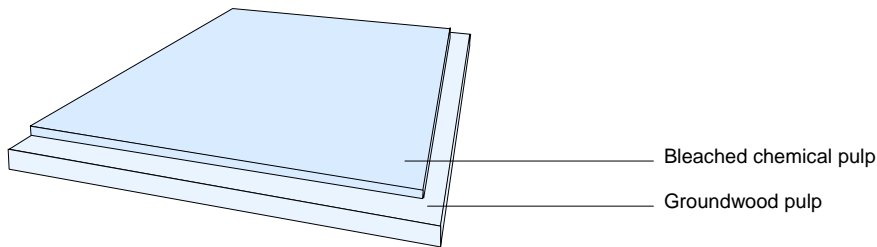

ISO 9001

### Specifications for Woodpulp Board 1S Frame:

Property/Unit	Tolerance			Standards
Grammage, g/m <sup>2</sup>	±5%	480	525	ISO 536
Thickness, µm	±5%	1100	1200	ISO 534
Moisture, %	±1.5	7.0	7.0	ISO 287
Surface Smoothness, PPS 10, µm		1800	1800	ISO 8791-2
Scott Bond, J/m <sup>2</sup>		>120	>120	TAPPI 569
Cobb 60, g/m <sup>2</sup> , Top		35	35	SCAN-P12
Cobb 60, g/m <sup>2</sup> , Reverse		35	35	SCAN-P12
pH of Aqueous Extract		7.5 - 10.0		ISO 6588
Alkali Reserve, mol/kg		>0.4	>0.4	ISO 10716

All properties according to Pankaboard measurements.

Test climate 23°C / 50%RH (according to ISO 187).  
Tolerances based upon 95% confidence limits, apply to reel average.  
In order to verify, reel average shall be based on 5 single measurements randomly sampled within the reel. These averages will be for at least 19 of 20 reels within the specification limits.

For more information contact your local sales representatives or

Pankaboard Oy,  
Ruukintie 2  
FIN-81750 Pankakoski  
Tel. +358 (0) 2046 123  
www.pankaboard.com

Issued 11/2006