


## Solid Groundwood Board

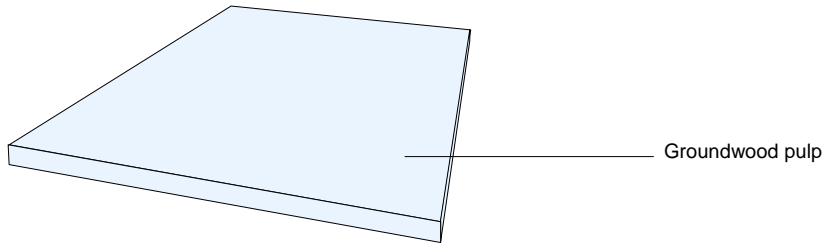

ISO 9001

### Specifications for Woodpulp Board AY Strong:

Property/Unit	Tolerance							Standards
Grammage, g/m <sup>2</sup>	±5%	200	260	300	320	380	480	ISO 536
Thickness, µm	±5%	360	460	550	570	700	880	ISO 534
Moisture, %	±1.5%	8.5	8.5	8.5	8.5	8.5	8.5	ISO 287
Surface Smoothness, Bendtsen, ml/min.		900	900	900	900	900	900	ISO 8791-2
Scott Bond, J/m <sup>2</sup>		170	170	170	170	170	170	TAPPI 569
Cobb 60, g/m <sup>2</sup> , Top		100	100	100	100	100	100	SCAN-P12
Cobb 60, g/m <sup>2</sup> , Reverse		100	100	100	100	100	100	SCAN-P12
pH of Aqueous Extract		7.5 – 10.0						ISO 6588
Alkali Reserve, mol/kg		>0.4	>0.4	>0.4	>0.4	>0.4	>0.4	ISO 10716

All properties according to Pankaboard measurements.

Test climate 23°C / 50%RH (according to ISO 187).  
Tolerances based upon 95% confidence limits, apply to reel average.  
In order to verify, reel average shall be based on 5 single measurements randomly sampled within the reel. These averages will be for at least 19 of 20 reels within the specification limits.

For more information contact your local sales representatives or

Pankaboard Oy,  
Ruukintie 2  
FIN-81750 Pankakoski  
Tel. +358 (0) 2046 123  
www.pankaboard.com

Issued 11/2006